




# BX306

## GNSS Real-time Kinematic (RTK) Board

### Overview

The BX306 is a cost-efficient GNSS RTK board for cm-level positioning and providing accurate raw measurement output, which can be integrated with autopilots and inertial navigation units.

The BX306 board supports three constellations (GPS L1/L2, GLONASS G1/G2, and BeiDou B1/B2) to improve the continuity and reliability of the RTK solution even in harsh environments. It features compatibility with other GNSS boards in the market via flexible interfaces, smart hardware design, and commonly used log/command formats.

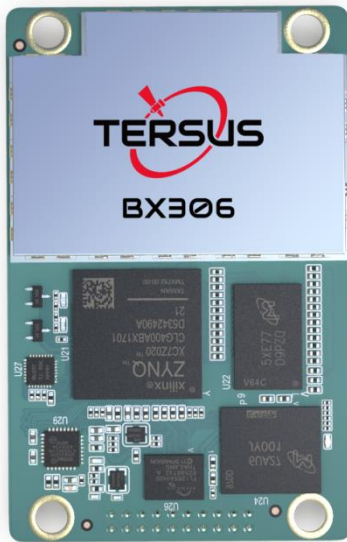

### Key Features

Supports GPS L1/L2, GLONASS G1/G2, and BeiDou B1/B2

Up to 20Hz RTK solution and raw data output

Supports IMU raw data output

Pin-to-pin compatible with NovAtel OEM615

Log/command compatible with NovAtel protocol

Supports event mark and PPS

Serial ports with LVTTTL

External antenna input through MCX connector

Data output: NMEA-0183 and Tersus binary format

Correction: RTCM 2.x/3.x/CMR/CMR+

Easy to integrate with Pixhawk and other autopilots



# Technical Specifications

## Performance

Frequencies:	
GPS L1/L2, GLONASS G1/G2, BeiDou B1/B2	
Standard Positioning Accuracy:	
– Horizontal (RMS):	1.5m
– Vertical (RMS):	3.0m
RTK Positioning Accuracy:	
– Horizontal (RMS):	10mm+1ppm
– Vertical (RMS):	15mm+1ppm
Observation Accuracy:	
– C/A Code (zenith direction):	10cm
– P Code (zenith direction):	10cm
– Carrier Phase (zenith direction):	1mm
Time To First Fix (TTFF):	
– Cold Start:	<50s
– Warm Start:	<30s
Timing Accuracy (RMS):	20ns
Velocity Accuracy (RMS):	0.03m/s
Initialization (typical):	<10s
Initialization Reliability:	>99.9%
Correction:	RTCM 2.x/3.x/CMR/CMR+
Max. Update Rate:	20Hz

## Communication

Serial Ports:	LVTTL x2
USB Ports:	USB device x1
CAN Ports:	ISO/DIS 11898 x2*
PPS Ports:	LVTTL x1
Event Mark:	LVTTL x2*

\* This port's function is related to FW version

## Physical

Input Voltage:	3.3V DC
Power Consumption (typical):	2.8W
Active Antenna Input Impedance:	50Ω
Size:	46x71x12mm
Weight:	23g
Antenna Connector:	MCX female x1
COM Baud Rate:	Up to 921600bps
Operating Temperature:	-40°C ~ +85°C

